


DC AXIAL FAN
40x40x56mm
 (High Performance Fan Series)

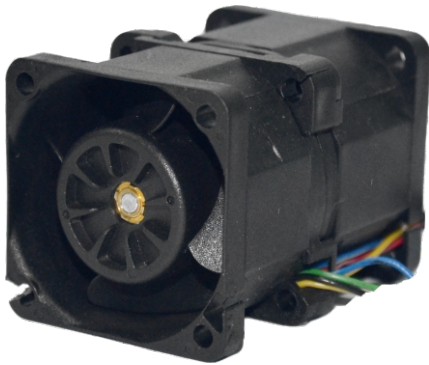

Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -10°C~70°C(Humidity 15%-65%RH)
 Storage Temperature: -20°C~85°C(Humidity 15%-65%RH)
 Lead Wire: UL Type #26 AWG
 Weight: 88.5g Packing: 200PCS/CTN

DC Axial Fans

Model Number	Voltage (VDC)	Op.Voltage (VDC)	Air Flow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FD4056B12W3-88H ★▲	12	6.0~13.8	38.70	94.70	73.50	18,000/17,000	2600	31.20	B	①
FD4056B12W5-88H ★▲	12	6.0~13.8	40.70	106.50	74.50	19,000/18,000	2800	33.60	B	②
FD4056B12W7-88H ★▲	12	6.0~13.8	42.60	117.90	75.50	20,000/19,000	3000	36.00	B	③

- If model depicts "★", auto restart protection function built in.
- If model depicts "▲", polarity protection function built in.

Specifications are subject to change without notice

