

DC BLOWER 120x120x32mm



Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -10°C~70°C(Humidity 15%-65%RH)
 Storage Temperature: -20°C~85°C(Humidity 15%-65%RH)
 Lead Wire: UL Type #26AWG
 Weight: 237 g Packing: 40PCS/CTN




DC Blowers

Model Number	Voltage (VDC)	Op.Voltage (VDC)	Air Flow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBD1232B12W3-88A ★▲	12	5.0~13.8	29.60	13.40	39.40	2,000	750	9.00	B,S	①
FBD1232B12W5-88A ★▲	12	5.0~13.8	36.50	25.50	44.80	2,500	1000	12.00	B,S	②
FBD1232B12W7-88A ★▲	12	5.0~13.8	43.50	37.50	50.20	3,000	1500	18.00	B,S	③
FBD1232B24W3-88A ★▲	24	12.0~26.0	29.60	13.40	39.40	2,000	250	6.00	B,S	①
FBD1232B24W5-88A ★▲	24	12.0~26.0	36.50	25.50	44.80	2,500	350	8.40	B,S	②
FBD1232B24W7-88A ★▲	24	12.0~26.0	43.50	37.50	50.20	3,000	550	13.20	B,S	③

- If model depicts "★", auto restart protection function built in.
- If model depicts "▲", polarity protection function built in.

Specifications are subject to change without notice

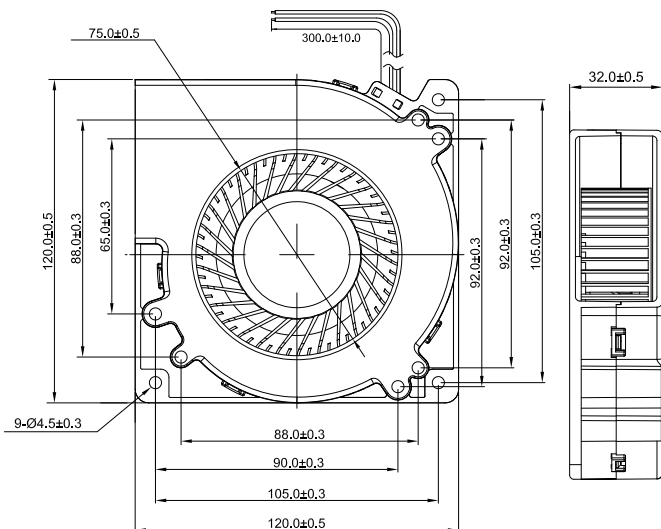

unit: mm

