

100W COB LED Lighting Fixture HG2100-001-A01







(COB Chip and LED Driver & Enclosure Not Included)

Features:

- Best 100W COB LED Lighting Fixture with Best Heat Pipes Thermal Solution
- Industry Best 100W COB Thermal Solution
- Patented Heat Pipes Absolute Embedding Flatness Technology
- Much Faster Heat Dissipation Speed to Avoid Light Decay Risk
- Most Advanced Cold-Forging Heat Sink Production Techniques
- Much Better Thermal Conductive Aluminum Material (AL 1070)
- Most Advanced Eletrophoresis Coating Surface Treatment for Best Corrosion Resistance
- Flexible Mounting Systems Custom Design & Built
- Great Variety of COB LED Lighting Applications

Product Information:

Model Number: DG180-100-A01 Dimension (mm): ∮180 x 80

100W COB Brightness (lm): 10,000~14,000 Cooling Surface Area (mm2): 398,982

Thermal Resistance(°C/W): 0.3~0.5 (Varies Upon COB Chips)


Total Dissipated Power (W): 80W~100W

Weight: 1.10 kgs/2.4 lbs


Material: AL1070 with 3pcs ∮ 6mm heat pipes


Surface Treatment Options: Electrophoresis Black or Glossy White

100W Heat Pipes Module Dimensions:

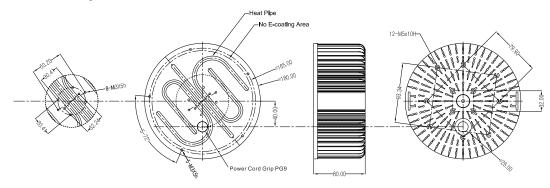



Heat Dissipation Simulation:






Temperature Rise Curve:







СОВ	LED Power (W)	Ambient Temperature Ta (°C)	COB Case Temperature Tc (°C)	Temperature Rise △T (°C)	Thermal resistance Rc-a (°C/W)	Angle of LED Simulator
Cree CXB 3590	100	25	67.4	42.4	0.42	90°
Bridgelux Vero 29	100	25	71.6	46.6	0.47	90°
Citizen CLU048	100	25	70.0	45.0	0.45	90°

Applications:

A great variety of applications in High Bay Light, Down Light, Flood Light, Street Light, Sports Light, and more.







